

Blue Vision 1011 i, b

(i - injection | b - boiler)

retigo®
Vision

VISION DESIGN

Appearance, reliability and functionality

- **Curved double glass door** – No more burns and energy losses
- **Unique cooking chamber surface** – Longer lifetime, more hygienic
- **5 -speed fan with auto reverse system** – Controlled evenness
- **Cross-wise racks** – No burned wrists or scalding, better visual control
- **Extra tray** – Enhanced capacity

VISION TOUCH CONTROLS

Easy to use in all conditions

- **Big colour touchscreen controls** – Lightning fast response and ease of use
- **Unbeatable touch controls** – Proper reaction even with oily or gloved fingers
- **Easy cooking** – Instant and simple cooking with new technology
- **Programming** – Easy to operate or customise (1000 programs/20 steps)
- **Pictograms, Touch&Cook** – Just double touch to start cooking

ADVANCED STEAM GENERATION SYSTEM

Outstanding results and efficiency

- **Advanced boiler system** – Ongoing cooking to deliver the best results in time for the diners
- **Advanced direct injection system** – Excellent cooking results thanks to highly saturated fresh steam
- **Automatic preheating/cooling** – Compensates loading temperature drops
- **Turbo steam function** – Fresh steam boost for immediate steam saturation
- **Autoclima** – Steam saturation control (1 % precision) for the best cooking results

RETIGO SMART INVESTMENT

One of the fastest returns on investment available on the market

- **Retigo Active cleaning system** – Economical semi-closed automatic cleaning
- **Active descaling system** – Automatic cooking chamber descaling
- **EcoLogic system** – Energy recuperation – energy savings proven by displayed consumption
- **WSS – Water Saving System** – Minimised water consumption
- **ACM - Automatic Capacity Management** – Automatic recognition of food volume for the best cooking results



UNIQUE FEATURES

B 1011 i, b

COOKING

- Hot air 30–300 °C
- Combination 30–300 °C
- Steaming 30–130 °C
- Bio steaming 30–98 °C
- Overnight cooking /baking – Saves time and money
Minimises weight loss of food
- Rack timing - Different products cooked at once resulting in time and energy savings
- Regeneration/banqueting – Cook, chill and regenerate to serve more at once
- Delta T cooking/baking – Excellent uniformity with big food chunks
- Low temperature roasting – Less weight loss, better taste
- Cook & Hold – Time savings in the kitchen, faster service
- Golden Touch – Controlled finishing for golden-brown crispy excellence

EQUIPMENT

- Massive door handle – Comfortable and safe handling
- Hand shower – Easy cleaning, no fighting with winding up
- 4-point core probe - Safe core temperature control
- Flap valve – Crispiness and no cross contamination of flavours
- Bi-directional fan – Excellent cooking and baking evenness
- Fan Stop – Prevents scalding when the door is opened quickly
- Ventilator fan timing – 3 steps for greater evenness
- AISI 304 stainless steel – No corrosion risks
- Perfect halogen illumination – Precise visual control
- Run-off tray under the door – No slipping on water
- Removable door gasket seal – Easy maintenance
- IPX5 protection – Maximum safety in the kitchen environment

CONTROLS

- Flat control panel – No broken mechanical knobs and buttons any more
- Vision agent – Virtual help at your fingertips
- Automatic start – Helps to reduce idle time and saves your time
- Learn function – Improves cooking standards every time
- QuickView – Fast program overview – Easy orientation in steps

DATA

- USB Plug-in – Easily record and load data to and from the combi oven
- LAN interface – Saves your time and performs monitoring with data management

SERVICE

- Instant HACCP records – Food quality ensured
- CCS – Calcium Control System – Keeps an eye on calc*
- BCS – Boiler Control System – Direct injection backup *
- SDS – Service and Diagnostic System – Lower servicing costs, time

BASIC UNIT OPTIONS

- Left door
- Second temperature core probe
- Safety door opening in two steps
- Set of combi ovens 611/1011
- Optional voltage 3N~/230V/50Hz
- Marine version – solution for vessels and other offshore installations

* – applies to boiler combi ovens only


STANDARD FEATURES

OPTIONAL ACCESSORIES

- ST 1116 – stainless steel stand with 16 trays GN 1/1
- ST 1116 FP – flat pack stand with 8 trays 1/1
- ST 1116 CS – stainless steel stand ST1116 with wheels
- ST 1116 H – stainless steel stand with 16 trays GN 1/1, height 900 mm
- STAINLESS STEEL STAND with place for Hold-o-mat
- STAINLESS STEEL STAND with space for BC411P or BC511P.C
- VISION VENT condensation hood
- GN ADAPTERS for 2x GN1/2 or 3x GN1/3

- KO 1011 R – loading rack
- GUIDE RACK for KO 1011 R, B or gas units
- VO 1011 – loading trolley for handling with KO 1011 R, B
- KO 1011 B – banquet basket for 29 or 24 plates
- TO 1011 – thermocover for KO 1011 R, B
- TRAY HOLDERS with spacing 85, 70 mm or for GN 400/600
- OIL SPRAY GUN

Placed on the stand ST 1116

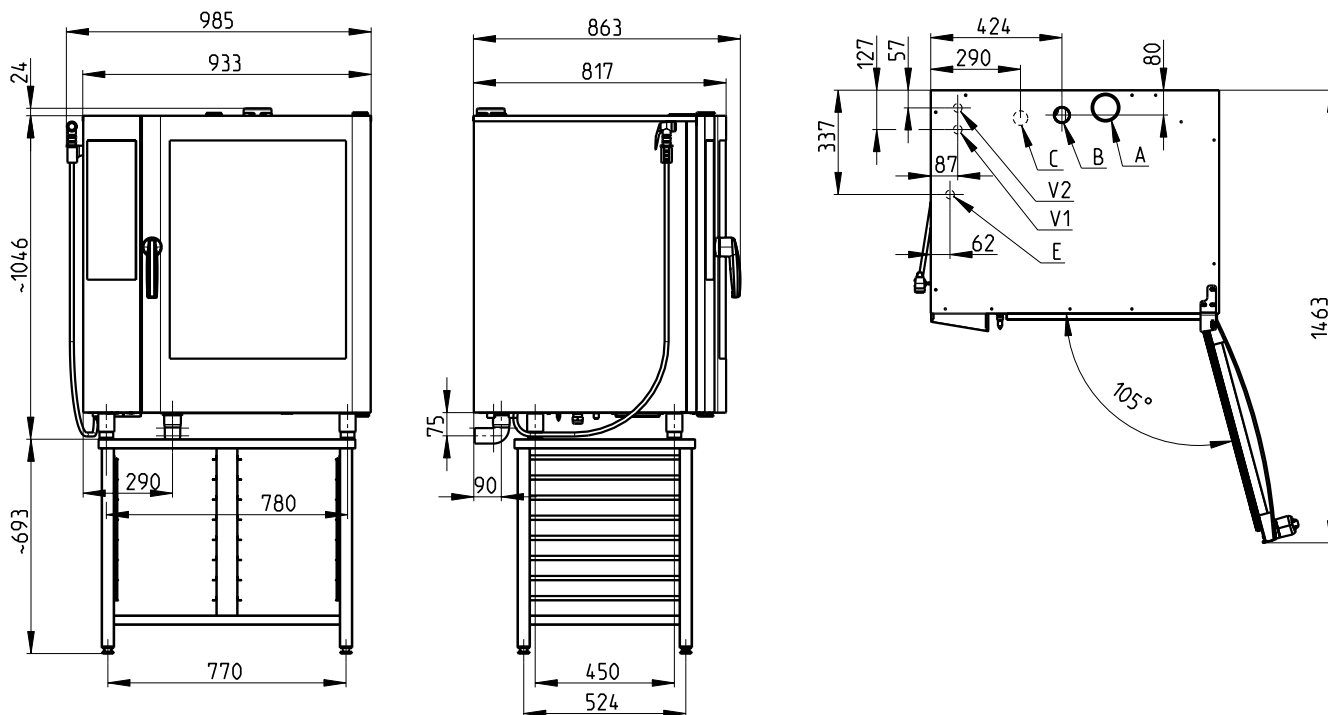

A - Flap valve, B - Chimney, C - Drain, E - Electricity, V1 – Untreated water, V2 – Treated water

B 1011 i

B 1011 b

Electricity	Energy	Electricity
Injection	Steam generation	Boiler
11 x GN 1/1	Capacity	11 x GN 1/1
11 x 400/600	Capacity (optional)	11 x 400/600
151 - 250	Capacity of meals	151 - 250
65	Spacing [mm]	65
933 x 1046 x 863	Dimensions (W x H x D) [mm]	933 x 1046 x 863
132 kg	Weight	138 kg
17.6 kW	Total power	17.6 kW
-	Steam generation power	12 kW
32 A	Fuse protection	32 A
3N~/400V/50Hz	Voltage	3N~/400V/50Hz
G 3/4" / 50	Water connection / drain [mm]	G 3/4" / 50
30 - 300 °C	Temperature	30 - 300 °C

SIZE	MODEL	TECHNICAL SPECIFICATION
1011	B1011i, B1011b	E1011IA, E1011BA