

Cake Display

蛋糕柜

ACD900/1200/1500/1800



01.不同颜色可选，迎合店铺装修风格。

02.圆角设计，经典耐看。

03.三层中空，防凝露处理。

01.Different colors available for satisfying your designs.

02.Classic and engaging arc edge design.

03.Three-layer silicone sealing strip for silent sliding door design.

Cake Display

蛋糕柜

ACD900/1200/1500/1800

产品优点 Product Features

- | | |
|------------------------------|---|
| 1.模块化拼装式结构，风冷无霜，永不凝露。 | 1.Modular assembly structure, air-cooled without frosting, never condensation |
| 2.配合店面装修，不同颜色自由选择。 | 2.Different colors offered to match with the interior design |
| 3.人体工学圆角设计，美观安全，自动化水装置。 | 3.Ergonomic round-edging design, beautiful and safe, self-condensation |
| 4.高透视率钢化玻璃，层架高度自由调节，LED柔光照明。 | 4.Ultra clear tempered glass, adjustable shelf height, LED soft lighting |

规格参数 Specification parameters

Model No.	ACD900	ACD1200	ACD1500	ACD1800
Temp Range(°C)温度 (°C)	+2 ~ +8	+2 ~ +8	+2 ~ +8	+2 ~ +8
External Dimension(mm)外尺寸 (毫米)				
Width 宽度	960	1260	1560	1860
Depth 深度	788	788	788	788
Height 高度	1206	1206	1206	1206
Glass Case 玻璃展示部分	2m ²	2.5m ²	3m ²	3.5m ²
Evaporator 蒸发器	纯铜管+铝翅片 Copper tube & aluminium fin			
Condensing unit 压缩机	进口压缩机 Imported compressor			
Legs 脚	可调高度60mm Adjustable up to 60 mm			
Display Dimension(mm)展示部分尺寸 (毫米)				
Base底:				
Width 宽度	850	1150	1450	1750
Depth 深度	515	515	515	515
Mid glass shelf 层板:				
Width 宽度	825	1125	1425	1725
Depth 深度	380	380	380	380
Power Supply 电压	220V	220V	220V	220V
Power Input(amps)电源输入 (安培)	10A	10A	16A	16A
Start up (amps) 启动时需输入的电 (安培)	6.1A	8.5A	13.2A	12A
Running (amps) 运行时输入的电 (安培)	3.4A	4.75A	7.35A	6.7A
Rating Power (watts) 功率	570W	780W	1070W	1260W
Condensing unit(HP) 机组 (匹)	1/4	1/2	1	1-1/4
Max.pipe length work(m) 最长电线长度 (米)	2.5m			
Refrigerant 制冷剂	R134a	R134a	R134a	R134a
Package size 包装尺寸	1110*938*1406	1410*938*1406	1710*938*1406	2010*938*1406

Product Features


产品优势

领先数控机床，标准化配件生产确保所有部件严丝合缝、精确安装。

Assemble Parts: With leading punching machine and standardized production procedures, all parts are closely fit and can assembly precisely

箱内搁物层板均为高透视率钢化玻璃,不仅使用安全而且其高度尺寸可自由调节,每层上方均设有三根LED灯管,用户可自由选择灯管。

Shelves are made of Ultra clear tempered glass. The shelves design is safety and freely to adjust. Besides, there are three LED lighting holders for customers to choose their lamp.

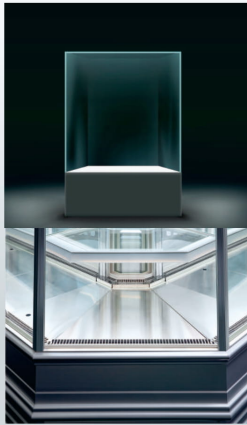

部件更换

哪里坏了哪里换操作简单, 省钱更省心
Replaceable Parts: Easy operation for saving money and time.

超大空间

冷柜内部连通, 空间利用率大大提升
Spacious room: Space increased significantly with no partition board inside



以零部件出口国外, 享受更优惠的税费, 为顾客压缩运输成本, 大大提升利润空间。
Increase the customer profit by enjoy the low taxation for components.

冷柜长度自由选择
Freely decide the width of cabinet

可根据面积选择拼装长度
三种规格可选 90/120/150cm
Can decide the width of cabinet based on the area
3 specification are provided: 90/120/150 cm

零件拼装

全部部件可以拼装
All parts are assembleable.



9 features

9大功能特点

- 01 模块拼装 Module assembly
- 02 全钢化玻璃 All tempered glass
- 03 防锈铝合金 Anti-rust aluminum alloy
- 04 创新的制冷结构设计 Innovative cooling structure
- 05 圆角造型设计 Round-edging design
- 06 高密度封柜门 High-sealing cabinet door
- 07 柜体不结凝露 No condensation
- 08 自动化水设计 Self-evaporation
- 09 智能控温 Intelligent temperature control

1. Original modular-structure design that can be assembled repeatedly, and carry out infinite length of 90-degree seamless inner connection. This design is very convenient for long-distance transportation that can reduce the logistic costs. Besides, compared with old-fashioned inner non-connected cabinet, the new design can reduce the consumption of raw materials that is significant in protecting the environment and reducing the over exploitation of resources.
2. The top and the side both are assemblable independent modules, plated with 24V electric heating membrane and toughened insulating glass structure. The glass surface never condenses, and the goods can be displayed clearly. Our firm and reliable structure is extremely safe to use.
3. The joints of the cabinet are made of high-strength antirust aluminum alloy, which not only has high anti-corrosion performance, but also can be freely changed in various colors. The front and bottom of the refrigerator can be freely removed, and the user can freely change the decorative materials and colors;
4. All the outer edges of the cabinet are designed with rounded corners of different sizes according to the frequency of the law of human body contact, which can effectively protect of users.
5. The innovative refrigeration system and structure design are far superior to the old-fashioned design in terms of preservation, moisture retention and quality guarantee of cake;
6. The door system is the first high sealing structural design of our company, which is far superior to the old refrigerators in terms of leakage prevention, high efficiency heat preservation, high efficiency and energy saving. Compared with the old refrigerators of the same type and volume, its energy consumption can be reduced by about 30%;
7. Removable 24 V anti condensation electric heating elements are set around the cabinet. The metal surface of the cabinet will never be condensed, so it is extremely safe and reliable to use;
8. The frost water automatic evaporation device is set at the bottom of the box, which can ensure the cleanness and safety of the workplace;
9. High intelligent microcomputer temperature controller, all-round automatic control of temperature in the box.



Patent technology
Assembly sketch map

专利技术，拼装示意图。



01 组装箱体
前面左右侧板直接用螺丝连接成箱体。
Assemble the cabinet body



02 安装机组
整体机组装置可直接固定在底板上。
Install the compressor unit



03 安装立柱
活动立柱插入箱体固定立柱内，用M6x35全螺纹六角头螺栓穿入固定立柱孔内与M6螺母锁紧。
Install the column



04 安装门框
移动顶门框底座上的活动支座至活动立柱上方，插入活动立柱内；顶门框底座与门框两端对齐，卡住门框。
Install the door frame

安装演示视频：



05 安装层架挂卡
层架挂卡按所需高度装配不锈钢层架调节板，塑料面在外，灯线从塑料内穿过；
Install the shelf supporting



06 安装层架
装前后风道，前后风道放入卡槽，铝型材卡槽内用塑件卡住，摆放层板。
Install the shelves



07 安装左侧和前端玻璃
左端板玻璃放入内端板座，前卡往后推入，卡住箱体前面板；前中空玻璃线插入箱体前面板预留孔内。
Install the left-side and front glass



08 安装右侧和顶部玻璃
顶中空玻璃线按前中空玻璃侧槽内预埋，用牵引线穿入箱体孔至内箱；右端板玻璃放入内端板座，前卡往后推入，卡住箱体前面板；
Install the right-side and top glass



09 安装前装饰条
前装饰条装入前面板槽内，从上拍下即可
Install the front trim strip