

fujimak Chiller & Freezer Series

Up-Right Series
Under Counter Series



Total support for the food business

fujimak

fujimak



UP-RIGHT SERIES



UP-RIGHT SERIES

CHILLER

FVR7680

FVR1280

FVR1580

FREEZER

FVF7680

FVF1280

FVF1580

UNDER COUNTER SERIES

CHILLER

FVRT1260

FVRT1560

FVRT1860

FVRT1275

FVRT1575

FVRT1875

FREEZER

FVFT1260

FVFT1560

FVFT1860

FVFT1275






FVFT1575

FVFT1875







UNDER COUNTER SERIES









■ A variety of options

		CHILLER	FREEZER
		810 mm	
Depth	Surface Width		
	760 mm	 FVR7680	 FVF7680
			1200 mm
	1500 mm		



		CHILLER	
		600 mm	750 mm
Depth Surface Width	1200 mm	 FVRT1260	 FVRT1275
	1500 mm	 FVRT1560	 FVRT1575
	1800 mm	 FVRT1860	 FVRT1875



		FREEZER	
		600 mm	750 mm
Depth Surface Width	1200 mm	 FVFT1260	 FVFT1275
	1500 mm	 FVFT1560	 FVFT1575
	1800 mm	 FVFT1860	 FVFT1875

The Ideal Model Of Refrigerator..

Maintains tastiness and freshness of food through all sorts of convenient and predominant functions.

We provide various models and are proud of our high reliability.



UP-RIGHT SERIES

Handle-free integrated door

The sleek surfaces are both hygienic and practical, allowing smooth, unimpeded movement.



Excellent cleanability

The smooth, unbroken surface makes it easy to clean.



Cleanability

The flat doors are superbly hygienic and easy to clean. Interlocking door seals can be removed simply by pulling.



Excellent thermal insulation

An insulating structure (door throat) that deepens the surround on the rear side of the door prevents heat penetration and maintains the internal temperature.



Temperature range

- Chiller model : +3°C to +15°C
- Freezer model : -23°C to -15°C

The temperature range is the adjustable range. The actual cabinet temperature depends on the ambient temperature and other conditions.

Control panel

The controller inside the refrigerator is the smallest, economical easy model and a simplified LED display with good visual effect.



Self-closing door

The self-closing door closes with a light push to ensure it's never left open by mistake.



Easy-to-clean internal structure

Internal corner sections are rounded off to ensure easy cleaning.




Easy-to-clean All Stainless Steel Wire Shelf



Easy-to-remove filter

The filter is simple to remove, making cleaning a breeze.

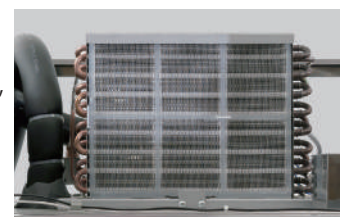

CHILLER

Depth 810mm

■ FVR7680



AC : 1PH220V
Overall power consumption : 50Hz 376.7W
The maximum current on normal situation : 1.92A
Overall Size : 760(W)×810(D)×2000(H)mm
Product Weight : 91kg
Actual Capacity of Chiller : **696ℓ**

■ FVR1280



AC : 1PH220V
Overall power consumption : 50Hz 436.4W
The maximum current on normal situation : 2.26A
Overall Size : 1200(W)×810(D)×2000(H)mm
Product Weight : 143kg
Actual Capacity of Chiller : **1146ℓ**

■ FVR1580



AC : 1PH220V
Overall power consumption : 50Hz 447.6W
The maximum current on normal situation : 2.38A
Overall Size : 1500(W)×810(D)×2000(H)mm
Product Weight : 165kg
Actual Capacity of Chiller : **1482ℓ**

FREEZER

Depth 810mm

■ FVF7680



AC : 1PH220V
Overall power consumption : 50Hz 586.7W
The maximum current on normal situation : 3.37A
Overall Size : 760(W)×810(D)×2000(H)mm
Product Weight : 91kg
Actual Capacity of Freezer : **696ℓ**

■ FVF1280



AC : 1PH220V
Overall power consumption : 50Hz 750.4W
The maximum current on normal situation : 4.16A
Overall Size : 1200(W)×810(D)×2000(H)mm
Product Weight : 143kg
Actual Capacity of Freezer : **1146ℓ**

■ FVF1580




AC : 1PH220V
Overall power consumption : 50Hz 857.6W
The maximum current on normal situation : 4.62A
Overall Size : 1500(W)×810(D)×2000(H)mm
Product Weight : 165kg
Actual Capacity of Freezer : **1482ℓ**

*Specification are subject to change without prior notice.

Under Counter

We provide robustness, durability and easy cleaning,
taking consideration of your frequent usage.

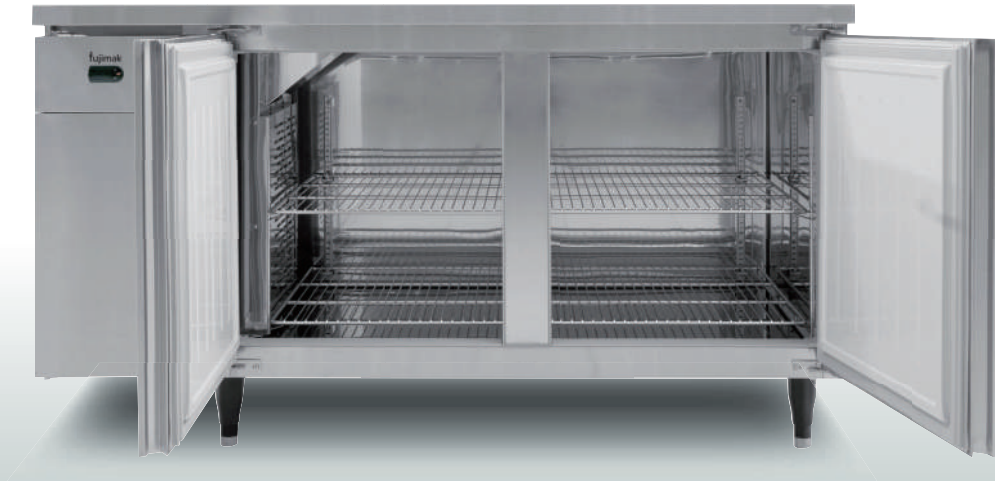

UNDER COUNTER SERIES

Handle-free integrated door

The sleek surfaces are both hygienic and practical, allowing smooth, unimpeded movement.



Cleanability

The flat doors are superbly hygienic and easy to clean. Interlocking door seals can be removed simply by pulling.



Self-closing door

The self-closing door closes with a light push to ensure it's never left open by mistake.



Easy-to-clean internal structure

Internal corner sections are rounded off to ensure easy cleaning.




**Easy-to-clean
All Stainless
Steel Wire Shelf**


With / without backsplash models

All models can be chosen with or without backsplash.

Without backsplash
(standard)



With backsplash
(option)



Control panel

Temperatures can be set in 1°C increments. Features display functions such as defrosting and high-temperature warnings.



Peripheral hygiene

The adjustable legs under the unit are a standard type with a height of 150 mm. This provides ample clearance for cleaning tools (mops, brushes, etc.) right to the back when cleaning the floor under the unit.



Temperature range

- Chiller model : +3°C to +15°C
- Freezer model : -23°C to -15°C

The temperature range is the adjustable range. The actual cabinet temperature depends on the ambient temperature and other conditions.

CHILLER

Depth 600mm

■ FVRT1260



AC : 1PH220V
Overall power consumption : 50Hz 340.6W
The maximum current on normal situation : 1.67A
Overall Size : 1200(W)×600(D)×850(H)mm
Product Weight : 90kg
Actual Capacity of Chiller : **197 ℓ**

■ FVRT1560



AC : 1PH220V
Overall power consumption : 50Hz 344.4W
The maximum current on normal situation : 1.69A
Overall Size : 1500(W)×600(D)×850(H)mm
Product Weight : 103kg
Actual Capacity of Chiller : **278 ℓ**

■ FVRT1860



AC : 1PH220V
Overall power consumption : 50Hz 348.1W
The maximum current on normal situation : 1.70A
Overall Size : 1800(W)×600(D)×850(H)mm
Product Weight : 123kg
Actual Capacity of Chiller : **353 ℓ**

Depth 750mm

■ FVRT1275



AC : 1PH220V
Overall power consumption : 50Hz 340.6W
The maximum current on normal situation : 1.67A
Overall Size : 1200(W)×750(D)×850(H)mm
Product Weight : 102kg
Actual Capacity of Chiller : **273 ℓ**

■ FVRT1575



AC : 1PH220V
Overall power consumption : 50Hz 344.4W
The maximum current on normal situation : 1.69A
Overall Size : 1500(W)×750(D)×850(H)mm
Product Weight : 113kg
Actual Capacity of Chiller : **381 ℓ**

■ FVRT1875



AC : 1PH220V
Overall power consumption : 50Hz 348.1W
The maximum current on normal situation : 1.70A
Overall Size : 1800(W)×750(D)×850(H)mm
Product Weight : 144kg
Actual Capacity of Chiller : **482 ℓ**

FREEZER

Depth 600mm

■ FVFT1260




AC : 1PH220V
Overall power consumption : 50Hz 432.6W
The maximum current on normal situation : 2.26A
Overall Size : 1200(W)×600(D)×850(H)mm
Product Weight : 90kg
Actual Capacity of Freezer : **197 ℓ**

■ FVFT1560



AC : 1PH220V
Overall power consumption : 50Hz 434.6W
The maximum current on normal situation : 2.28A
Overall Size : 1500(W)×600(D)×850(H)mm
Product Weight : 103kg
Actual Capacity of Freezer : **278 ℓ**

■ FVFT1860

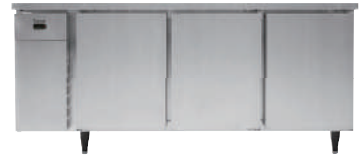

AC : 1PH220V
Overall power consumption : 50Hz 572.1W
The maximum current on normal situation : 3.25A
Overall Size : 1800(W)×600(D)×850(H)mm
Product Weight : 123kg
Actual Capacity of Chiller : **353 ℓ**

Depth 750mm

■ FVFT1275



AC : 1PH220V
Overall power consumption : 50Hz 432.6W
The maximum current on normal situation : 2.26A
Overall Size : 1200(W)×750(D)×850(H)mm
Product Weight : 102kg
Actual Capacity of Freezer : **273 ℓ**

■ FVFT1575



AC : 1PH220V
Overall power consumption : 50Hz 568.4W
The maximum current on normal situation : 3.24A
Overall Size : 1500(W)×750(D)×850(H)mm
Product Weight : 113kg
Actual Capacity of Freezer : **381 ℓ**

■ FVFT1875



AC : 1PH220V
Overall power consumption : 50Hz 572.1W
The maximum current on normal situation : 3.25A
Overall Size : 1800(W)×750(D)×850(H)mm
Product Weight : 144kg
Actual Capacity of Freezer : **482 ℓ**

fujimak

fujimak corporation

fujimak corporation Oversea Department

1-7-23, Minamiazabu, Minato-ku, Tokyo, Japan 106-0047 TEL: +81-3-4235-2250 FAX: +81-3-5439-2323 oversea@fujimak.co.jp

FUJIMAK FOOD SERVICE EQUIPMENT SINGAPORE PTE.LTD.

30 Hillview Terrace, Singapore 669246
TEL: +65-6762-0122 fujimak@singnet.com.sg

FUJIMAK GUAM CORPORATION

643 Chalan San Antonio, KG Plaza, Suite 118, Tamuning Guam
TEL: +1-671-649-3263 fujimak@teleguam.net

FUJIMAK TAIWAN CORPORATION

3FL., No.13, Lane 65, Sec.2, Zhong Shan N.RD.,
Zhong Shan District, Taipei, Taiwan, Roc 10446
TEL: +886-2-2581-5552 info@fujimak.com.tw

FUJIMAK SHANGHAI CORPORATION

Room 105-205, Building 7, No.930-49, Zhenbei Road,
Putuo District, Shanghai, China 200333
TEL: +86-21-6291-9060 admin@fujimak-sh.com

FUJIMAK SHANGHAI CORPORATION BEIJING BRANCH

Room 8A 2011, Xinguangda Center, Tongzhou District,
Beijing 101149
TEL: +86-10-8424-4550 admin@fujimak-sh.com

FUJIMAK HONG KONG COMPANY LIMITED

Unit1,12/F., Shiu Fat Industrial Building 139-141 Wai Yip Street,
Kwun Tong Kowloon, Hong Kong
TEL: +852-2345-2177 info@fujimak.com.hk

FUJIMAK VIETNAM COMPANY LIMITED

8F, 161 Ung Van Khiem Street, Ward 25,
Binh Thanh District, Ho Chi Minh City, Vietnam
TEL: +84-28-3636-0300 info@fujimak.com.vn

FUJIMAK (THAILAND) CO.,LTD.

159/16 Serm-Mit Tower, 10th FL., Room No.1001
Sukhumvit 21 (Asoke), Klongtoey-Nua, Wattana, Bangkok,
10110 Thailand
TEL: +66-2-661-7603 info@fujimak.co.th

FUJIMAK(CAMBODIA)COMPANY LIMITED

No28 St. 288, Sangkat Olympic, Khan Chamkarmon,
Phnom Penh, Cambodia
TEL: +855-23-982-388 info@fujimak.com.kh