



# Electrolux

## Digital Undercounter 2 Door Refrigerated Counter , -2+10°C, Stainless Steel

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_


SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

2 Door Refrigerated Counter , -2+10°C, Stainless Steel  
Digital Undercounter

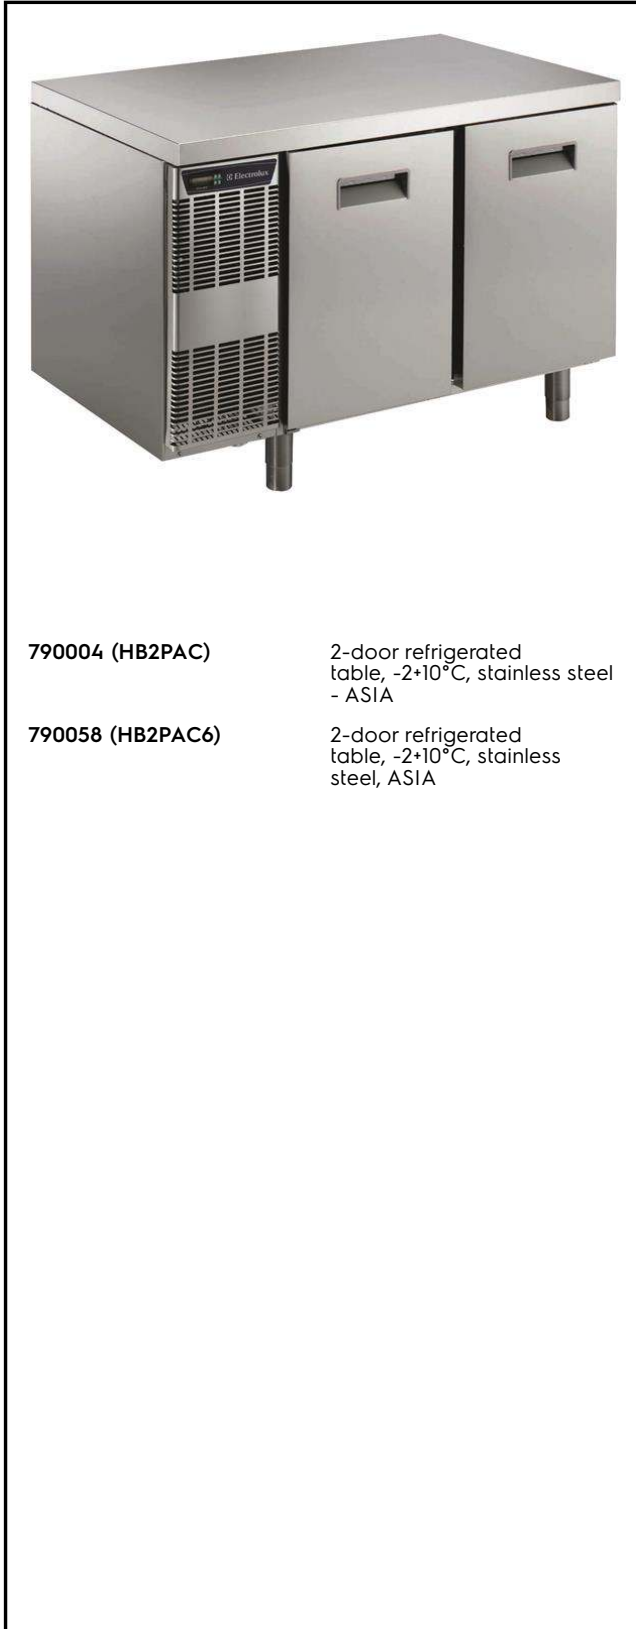

790004 (HB2PAC)

2-door refrigerated table, -2+10°C, stainless steel - ASIA

790058 (HB2PAC6)

2-door refrigerated table, -2+10°C, stainless steel, ASIA

### Main Features

- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Easy to clean reversible door with rounded internal corners.
- Unique airflow design to allow installation against the wall or against other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Doorframe heater, activated according to external temperature, avoids condensation build-up around the door frame.


### Construction

- Built-in compressor to suit operating conditions.
- Mounted on 150 mm adjustable feet.
- Anti-drip profile on stainless steel worktop edge.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Access to all components from the front.
- Full stainless steel construction. Internal structure and worktop in AISI 304 Stainless steel.
- Self closing and reversible left/right doors.
- Fully extractable cooling unit to facilitate maintenance.
- Recessed area in the back to facilitate installation.
- Electronic protection against high voltage peaks.
- High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection for long-term insulation and energy saving.
- CFC, HCFC, HFC-free insulation.
- Removable magnetic gasket door with hygienic design.

APPROVAL: \_\_\_\_\_



Experience the Excellence  
www.professional.electrolux.com  
professional@electrolux.com

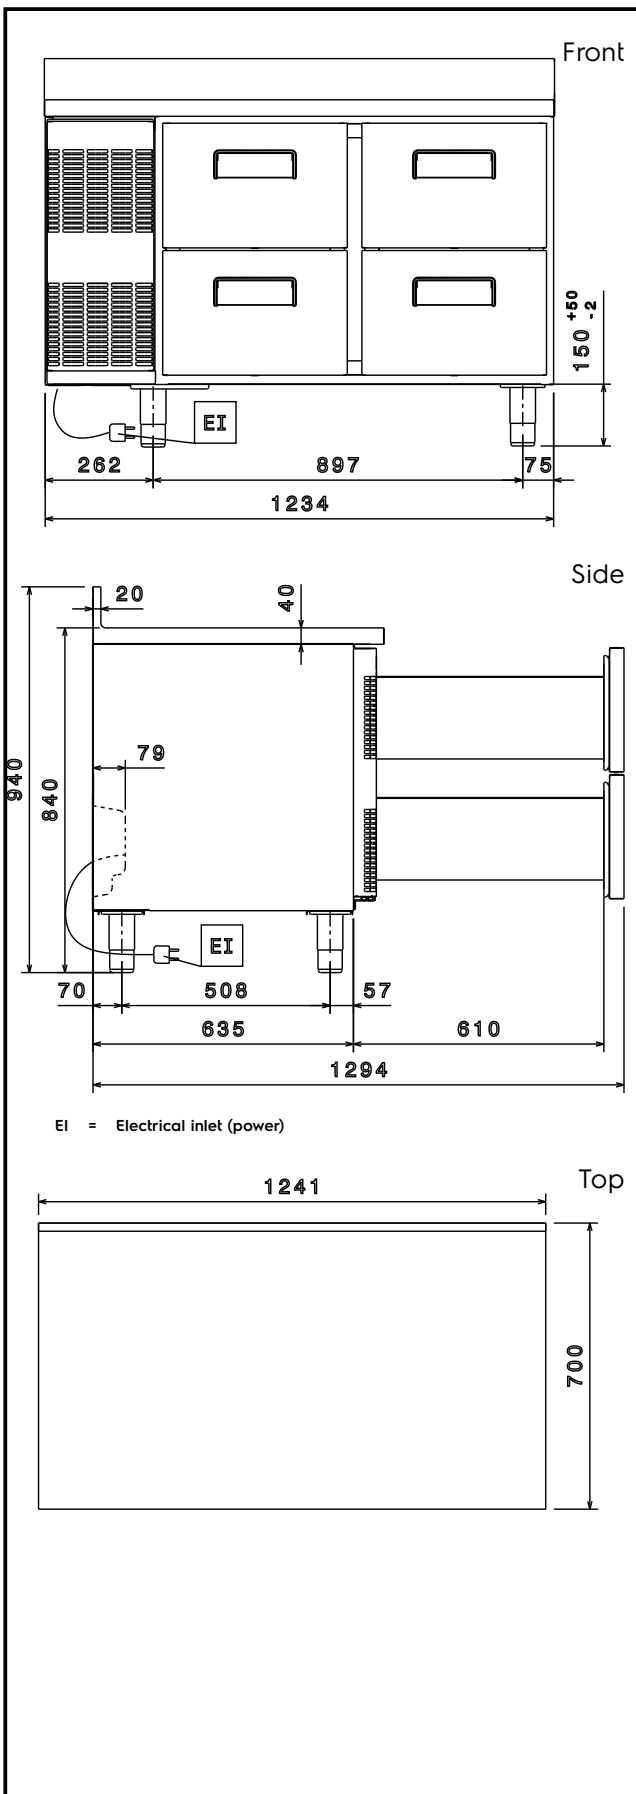

## Electric

### Supply voltage:

|                  |                       |
|------------------|-----------------------|
| 790004 (HB2PAC)  | 220-230 V/1N ph/50 Hz |
| 790058 (HB2PAC6) | 220 V/1N ph/60 Hz     |

Electrical power max.: 0.35 kW

## Key Information:

|   |         |
|---|---------|
| Gross capacity:                             | 265 lt  |
| Door hinges:                                |         |
| External dimensions, Width:                 | 1238 mm |
| External dimensions, Height:                | 840 mm  |
| External dimensions, Depth:                 | 700 mm  |
| External dimensions, Depth with Doors Open: |         |
| 790004 (HB2PAC)                             | 1100 mm |
| 790058 (HB2PAC6)                            | 1098 mm |
| Depth with doors open:                      |         |
| 790004 (HB2PAC)                             | 1100 mm |
| 790058 (HB2PAC6)                            | 1098 mm |

## Refrigeration Data

|                             |        |
|-----------------------------|--------|
| Compressor power:           | 1/3 hp |
| Refrigerant type:           | R404A  |
| Refrigeration power:        |        |
| 790004 (HB2PAC)             | 877 W  |
| 790058 (HB2PAC6)            | 1139 W |
| Refrigerant weight:         |        |
| 790004 (HB2PAC)             | 250 g  |
| 790058 (HB2PAC6)            | 240 g  |
| Operating temperature min.: | -2 °C  |
| Operating temperature max.: | 10 °C  |

## Included Accessories

- 2 of 1x1/1GN PVC grid for counters PNC 880299

## Optional Accessories

- Lock kit for counters PNC 880227
- Kit integrated HACCP for digital refrigerators (IR33) (only for 790004) PNC 880252
- 1x1/1GN PVC grid for counters PNC 880299
- Kit of 5 wheels (front with brake) for cabinets and counters PNC 880301
- Kit of 2x½ drawers for counters PNC 880305
- Kit of 3x½ drawers for counters PNC 880309